


TECH - NOTE

Rotary Switch - 2 Pole, 6 Position Wiring for Dual Coil PHC Pickup

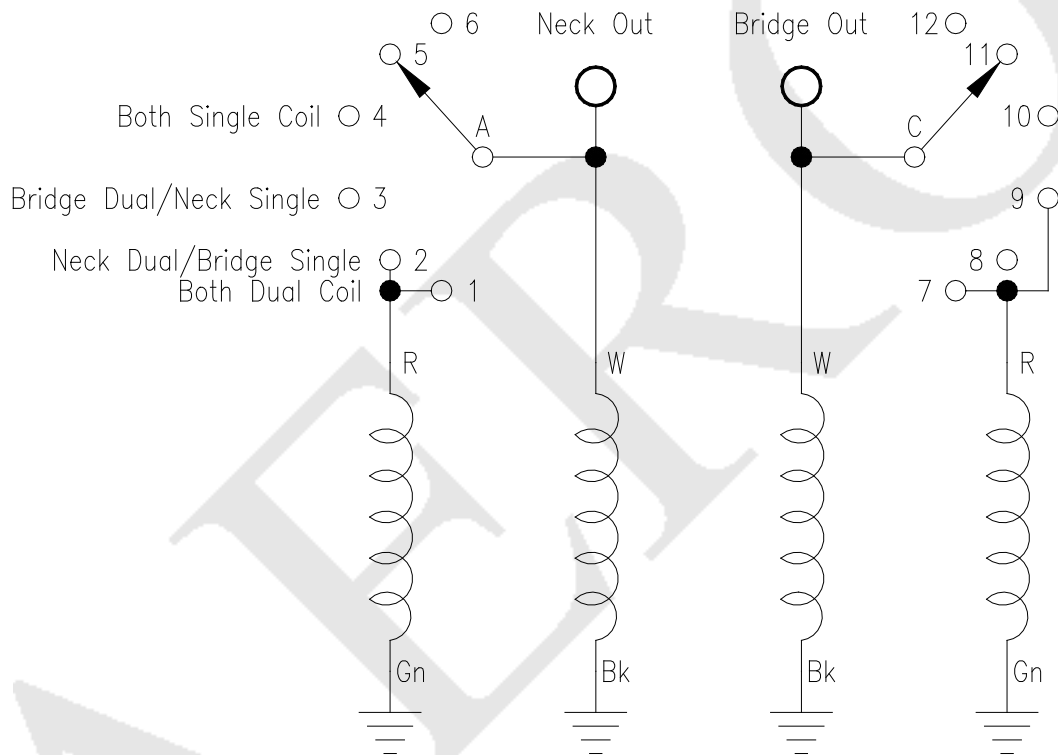

Notes:

1. Set rotary switch stop peg at 4 position
2. Bk & Gn Wires -> Ground
3. Neck Pickup - R to pin # 1, W to pin # A
4. Bridge Pickup - R to pin # 7, W to pin # C
5. Outputs at pin # A for Neck, and pin # C for Bridge
6. Position 1 = Neck & Bridge Single Coil
7. Position 2 = Neck Single Coil & Bridge Dual Coil
8. Position 3 = Bridge Single Coil & Neck Dual Coil
9. Position 4 = Neck & Bridge Dual Coil